




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04L 1/00, 1/06	A1	(11) International Publication Number: WO 00/14921
		(43) International Publication Date: 16 March 2000 (16.03.00)
<p>(21) International Application Number: PCT/US99/19117</p> <p>(22) International Filing Date: 23 August 1999 (23.08.99)</p> <p>(30) Priority Data: 60/099,212 4 September 1998 (04.09.98) US 09/300,494 28 April 1999 (28.04.99) US</p> <p>(71) Applicant: AT & T CORP. [–/US]; 32 Avenue of the Americas, New York, NY 10013–2412 (US).</p> <p>(72) Inventors: CALDERBANK, Arthur, Robert; 85 Worths Mill Lane, Princeton, NJ 08540 (US). NAGUIB, Ayman, F.; 1701 Springfield Avenue, New Providence, NJ 07974 (US). SESHADRI, Nambirajan; 88 Van Houton Avenue, Chatham, NJ 07928 (US).</p> <p>(74) Agents: CONOVER, Michele, L. et al.; AT & T Corporation, P.O. Box 4110, Middletown, NJ 07748–4801 (US).</p>		<p>(81) Designated States: BR, CA, CN, JP, KR, MX, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published With international search report.</p>

(54) Title: COMBINED CHANNEL CODING AND SPACE-BLOCK CODING IN A MULTI-ANTENNA ARRANGEMENT

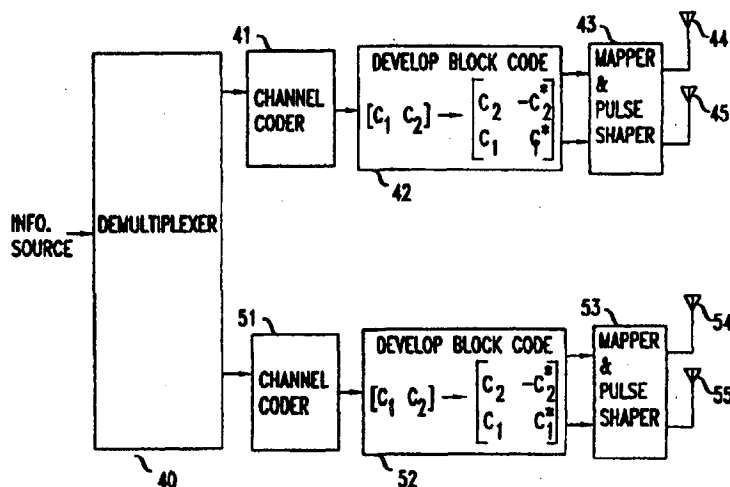

(57) Abstract

Enhanced performance is achieved by combining channel coding with the space-time coding principles. With K synchronized terminal units transmitting on N antennas to a base station having M $\$m(G K)$ receive antennas, increased system capacity and improved performance are attained by using a concatenated coding scheme where the inner code is a space-time block code and the outer code is a conventional channel error correcting code. Information symbols are first encoded using a conventional channel code, and the resulting signals are encoded using a space-time block code. At the receiver, the inner space-time block code is used to suppress interference from the other co-channel terminals and soft decisions are made about the transmitted symbols. The channel decoding that follows makes the hard decisions about the transmitted symbols. Increased data rate is achieved by, effectively, splitting the incoming data rate into multiple channels, and each channel is transmitted over its own terminal.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Combined Channel Coding And Space-Block Coding In A Multi-Antenna Arrangement

5 **Background of the Invention**

This invention relates to wireless communication and, more particularly, to techniques for effective wireless communication in the presence of fading, co-channel interference, and other degradations.

Physical limitations of wireless channels present a fundamental
10 technical challenge to reliable communication. Bandwidth limitations, propagation loss, time variance, noise, interference, and multipath fading make the wireless channel a narrow “pipe” that does not easily accommodate the flow of data. Further challenges come from power limitation, size, and speed of devices that are employed within portable
15 wireless apparatus.

Employing multiple transmit antennas at both the base and the remote stations increases the capacity of wireless channels, and information theory provides a measure of this increase. The standard approach to exploit this capacity is linear processing at the receiver, as
20 described, for example, by J. Winters, J. Salz and R. D. Gitlin, in “The impact of antenna diversity on the capacity of wireless communication systems” *IEEE Trans. Communications*, Vol. 42, No. 2/3/4, pp. 1740-1751, Feb/March/April 1994. Transmit diversity has been explored by Wittneben in “Base station modulation diversity for digital
25 SIMULCAST,” *Proc. IEEE VTC*, pp. 505-511, May 1993, and by Seshadri and Winters in “Two signaling schemes for improving the error performance of frequency-division-duplex (FDD) transmission systems using transmitter antenna diversity,” *International Journal of Wireless Information Networks*, Vol. 1, No. 1, 1994. The Wittneben

and Seshadri et al papers approach transmit diversity from a signal processing point of view.

Space-time codes combine signal processing at the receiver with coding techniques appropriate to multiple transmit antennas. See, for
5 example, V. Tarokh, N. Seshadri, and A. R. Calderbank in "Space-Time Codes For High Data Rate Wireless Communication: Performance Analysis and Code Construction," *IEEE Trans. Info. Theory*, Vol. 44, No. 2, pp. 744-765, March 1998. The space-time approach provides significant gain over the aforementioned prior art.
10 Specific space-time codes designed for 2-4 transmitting antennas perform well in slowly varying fading environments (such as indoor transmission) and come with in 2-3 dB of the theoretical outage capacity. Outage capacity is described, for example, by J. Foschini, Jr. and M. J. Gans, "On limits of wireless communication in a fading
15 environment, when using multiple antennas," *Wireless Personal Communication*, Vol. 6, No. 3, pp. 311-335, March 1998. The bandwidth efficiency of the codes described in the Tarokh et al paper is about 3-4 times that of the current systems. The most important contributor to the improved performance is diversity, which may be
20 thought of as providing a number of replicas of the transmitted signal to the receiver, with some replicas being less attenuated by fading. The space-time codes presented in the Tarokh et al paper provide an optimized trade-off between constellation size, data rate, diversity gain, and trellis complexity

25 When the number of transmit-antennas is fixed, decoding complexity (measured, for example, by the number of trellis states in the decoder) increases exponentially with transmission rate. This can be refined to some extent by designing space-time codes with a multi-level structure and adopting multi-stage decoding, as described by

Tarokh et al. For a moderate number of transmit antennas (3-6), this method provides higher data rates while reducing the decoding complexity. However, there is a penalty to be paid for simplified decoding. Multi-stage decoding is sub-optimal, due in part to
5 magnification in the error coefficient, and this performance penalty means that alternative solutions are needed for achieving very high data rates.

In order to achieve very high data rates on narrowband wireless channels, many antennas are needed at both the transmitter and the
10 receiver. Consider a wireless communication system employing n transmit and m receive antennas, where the subchannel between each transmit and receive antenna is quasi-static Rayleigh, flat, and independent of others. If n is fixed, then the capacity increases logarithmically with m . On the other hand, if m is fixed then intuition
15 suggests that there must come a point where adding more transmit antennas will not make much difference. Indeed, this can be seen in the mathematics of outage capacity, shown by Foschini and Gans in the aforementioned paper. Thus, it turns out that in the presence of one receive antenna little can be gained in terms of outage capacity by using
20 more than 4 transmit antennas. A similar argument shows that if there are two receive antennas, using 6 transmitting antennas provides almost all of the capacity increase that can be obtained.

If n increases and $m \geq n$, then information theory shows that the capacity of the system increases at least linearly as a function of n .
25 Thus, it makes sense to increase the number of antennas at both receiver and transmitter in order to obtain higher capacities. Employing many antennas at both transmitter and receiver creates a multiple-input multiple-output system where the number of degrees of freedom is given by the product of the number of transmit and receive antennas.

Foschini considered such a system in "Layered space-time architecture for wireless communication in a fading environment when using multi-element antennas," *Bell Labs Technical Journal*, Vol. 1, No. 2, Autumn 1996. He proposed a multi-layered structure that, in principle, can achieve a tight lower bound on the capacity. If n transmit and n receive antennas are used, then at the receiver the transmitted signal from transmit antenna 1 is treated as the desired signal, while the signals transmitted from other transmit antennas are treated as interference. Linear processing is then used to suppress the interfering signals using n receive-antennas, providing a diversity gain of one. Once the signal transmitted from antenna 1 is correctly detected, the signal transmitted from antenna 2 is treated as the desired signal while the signals transmitted from transmit antennas 3, 4, ..., n are treated as interference. The contribution of the signal transmitted from antenna 1, now that it has been detected, is subtracted from the signal received at receiver antennas 1 through n . Thereafter, detection of the signal transmitted by antenna 2 proceeds with linear processing that is applied to suppress the interfering signals from antennas 3 through n . This provides a diversity gain of two. This process is repeated until all the transmitted signals are detected. Clearly, the worst case diversity in this architecture is one. For such a system, long frames of data combined with powerful coding techniques are needed to achieve the lower bound on outage capacity.

In U.S.A. Application Serial No. 09/114838 filed July 14, 1998, claiming priority of U.S. A. Provisional Application Number 60/052689 filed July 16, 1997, an arrangement is disclosed that provides enhanced performance which is realized by employing a perspective that combines array signal processing with channel coding. Specifically, antennas at the transmitter are partitioned into small

groups, and individual space-time codes are used to transmit information from each group of antennas. At the receiver, an individual space-time code is decoded by a linear array processing technique that suppresses signals transmitted by other groups of antennas by treating
5 them as interference. The contribution of the decoded signal to other received signal is then subtracted from those received signals. What results is a simple receiver structure that provides diversity and coding gain over uncoded systems with a given diversity gain. This combination of array processing at the receiver and coding techniques
10 for multiple transmit antennas provides reliable and very high data rate communication over wireless channels. One advantage of the group interference suppression method over the Foschini architecture is that the number of receive antennas can be less than the number of transmit antennas.

15 In U.S.A. Application Serial No. 09/149,163 filed Sep. 4, 1999, claiming priority of U.S. A. Provisional Application Number 60/052689 filed July 17, 1997, an arrangement is disclosed wherein K synchronized terminal units transmit on N antennas to a base station having $M \geq K$ antennas. An improvement is achieved by employing
20 both interference cancellation (IC) and maximum likelihood (ML) decoding. More specifically, space-time block coding is employed in transmitters that employ N transmit antennas each, and the signals are received in a receiver that employs M receiving antennas. By exploiting the structure of the space-time block code, $K-1$ interfering
25 transmitting units are cancelled at the receiver, regardless of the number of transmitting antennas, N , when decoding the signals transmitted by a given mobile unit. Also disclosed is an arrangement where signals of a first terminal unit are decoded first, and the resulting decoded signals are employed to cancel their contribution to the signals received at the

base station antennas while decoding the signals of the remaining $K-1$ terminal units. The process is repeated among the remaining $K-1$ terminal units.

5 Summary of the Invention

Enhanced performance is achieved by combining channel coding with the space-time coding principles disclosed in the '163 applications. More specifically, with K *synchronized* terminal units transmitting on N antennas to a base station having $M \geq K$ receive
 10 antennas, increased system capacity and improved performance are attained by using a concatenated coding scheme where the inner code is a space-time block code and the outer code is a conventional channel error correcting code. That is, information symbols are first encoded using a conventional channel code. The channel code is then encoded
 15 signal is then encoded using a space-time block code, and transmitted over N antennas. At the receiver, the inner space-time block code is used to suppress interference from the other co-channel terminals and soft decisions are made about the transmitted symbols. The channel decoding that follows makes the hard decisions about the transmitted
 20 symbols.

Increased data rate is achieved by, effectively, splitting the incoming data rate into multiple channels, and each channel is transmitted over its own terminal. Viewed another way, information symbols from a transmitting terminal is split into L parallel streams.
 25 Stream l is encoded using a channel code with rate R_l and then coded with a space-time block encoder with N transmitting antennas. Advantageously, the coding rates are chosen such that

$$R_1 > R_2 > \dots > R_L.$$

Brief Description of the Drawing

FIG. 1 depicts an arrangement that, illustratively, includes a base station 30 with four antennas, a terminal units 20 with two antennas, and a terminal unit 20 with two antennas; and

5 FIG. 2 illustrates a terminal unit that splits the input signal into two streams, and each stream is transmitted over a separate two-antenna arrangement.

Detailed Description

10 FIG. 1 illustrates a unit 10 that employs a space-time block coding unit 13 that is followed by a conventional constellation mapper and pulse shaping circuit 16. The output of circuit 16 is fed to two transmitting antennas 11 and 12. The input symbols to the space-time block encoder are divided into groups of two symbols each, and at a
15 given symbol period, the two symbols in each group $\{c_1, c_2\}$ are transmitted simultaneously from the two antennas. The signal transmitted from antenna 11 is c_1 and the signal transmitted from antenna 12 is c_2 . In the next symbol period, the signal $-c_2^*$ is transmitted from antenna 11 and the signal c_1^* is transmitted from
20 antenna 12.

In receiver 20, signals are received by antennas 21 and 22 and are applied to detector 25. Channel estimators 23 and 24 operate on the incoming signal of antennas 21 and 24, respectively, in a conventional manner to develop estimates of the channel parameters. Those
25 estimates are applied to detector 25. In the mathematical development of the algorithms disclosed herein, it is assumed that the channel from each of the two transmit antennas remains fixed over a two consecutive symbol periods. That is,

8

$$h_i(nT) = h_i((n+1)T), \quad i = 1, 2. \quad (1)$$

To ascertain the channel characteristics, the transmitter carries out a calibration session, during which pilot signals or tones are transmitted. It is the signals that are received during the calibration session that are
 5 utilized by the channel estimator circuits 23 and 24, which are well known circuits.

Maximum Likelihood Detection

The received signals at antenna 21 can be expressed as

$$r_1 = h_1 c_1 + h_2 c_2 + \eta_1 \quad (2)$$

$$10 \quad r_2 = -h_1 c_2^* + h_2 c_1^* + \eta_2, \quad (3)$$

where r_1 and r_2 are the received signals over two consecutive symbol periods, h_1 denotes the fading channel between transmit antenna 11 and receive antenna 21, h_2 denotes channel between transmit antenna 12 and receive antenna 21, and η_1 and η_2 are noise terms, which are
 15 assumed to be complex Gaussian random variables with zero mean and power spectral density $N_0/2$ per dimension. Defining the vectors $\mathbf{r} = [r_1 r_2^*]^T$, $\mathbf{c} = [c_1 c_2]^T$, and $\boldsymbol{\eta} = [\eta_1 \eta_2^*]^T$, equations (2) and (3) can be rewritten in a matrix form as

$$\mathbf{r} = \mathbf{H} \cdot \mathbf{c} + \boldsymbol{\eta}, \quad (4)$$

20 where the channel matrix \mathbf{H} is defined as

$$\mathbf{H} = \begin{bmatrix} h_1 & h_2 \\ h_2^* & -h_1^* \end{bmatrix}. \quad (5)$$

The vector $\boldsymbol{\eta}$ is a complex Gaussian random vector with zero mean and covariance $N_0 \cdot \mathbf{I}$. Defining \mathcal{C} as the set of all possible symbol pairs

$\mathbf{c} = \{c_1, c_2\}$, and assuming that all symbol pairs are equi-probable, it

25 can be easily shown that the optimum maximum likelihood (ML)

decoder selects from \mathcal{C} the symbol pair $\hat{\mathbf{c}}$ that minimizes the expression

$\|\mathbf{r} - \mathbf{H} \cdot \hat{\mathbf{c}}\|^2$. This can be written as

$$\hat{\mathbf{c}} = \arg \min_{\hat{\mathbf{c}} \in \mathcal{C}} \|\mathbf{r} - \mathbf{H} \cdot \hat{\mathbf{c}}\|^2. \quad (6)$$

It was shown by S. Alamouti in "Space Block Coding: A simple Transmitter Diversity Scheme for wireless Communications,"

5 submitted to IEEE JSAC, September 1997, that the diversity order of the above space-time block code is equivalent to that of a two branch maximal ratio receive combining (MRRC). Alamouti also showed that, because of the orthogonality of the matrix \mathbf{H} , this decoding rule decomposed into two separate decoding rules for c_1 and c_2 . The
10 *uncertainty*, Δ_c , of the decoded symbols $\hat{\mathbf{c}}$ is defined as

$$\Delta_c = \|\mathbf{r} - \mathbf{H} \cdot \hat{\mathbf{c}}\|^2. \quad (7)$$

The maximum likelihood (ML) rule of equation (6) can be simplified by realizing that the channel matrix \mathbf{H} is orthogonal; that is, that $\mathbf{H}^* \mathbf{H} = (|h_1|^2 + |h_2|^2) \mathbf{I}$. This yields a modified received vector,

$$15 \quad \tilde{\mathbf{r}} = \mathbf{H}^* \mathbf{r} = (|h_1|^2 + |h_2|^2) \cdot \mathbf{c} + \tilde{\boldsymbol{\eta}}, \quad (8)$$

where $\tilde{\boldsymbol{\eta}} = \mathbf{H}^* \boldsymbol{\eta}$. This leads to

$$\hat{\mathbf{c}} = \arg \min_{\hat{\mathbf{c}} \in \mathcal{C}} \|\tilde{\mathbf{r}} - (|h_1|^2 + |h_2|^2) \cdot \hat{\mathbf{c}}\|^2. \quad (9)$$

Thus it follows that by using a simple linear combining, the decoding rule of equation (9) reduces to two separate, and much simpler,
20 decoding rules for c_1 and c_2 . When using a signaling constellation with 2^b constellation points, this reduces the number of decoding metrics that have to be computer for ML decoding from 2^{2b} to 2×2^b .

When receiver 20 uses M receiver antennas, the received vector at antenna m is

$$25 \quad \mathbf{r}_m = \mathbf{H}_m \cdot \mathbf{c} + \boldsymbol{\eta}_m, \quad (10)$$

10

where the channel matrix \mathbf{H}_m is defined as

$$\mathbf{H}_m = \begin{bmatrix} h_{1m} & h_{2m} \\ h_{2m}^* & -h_{1m}^* \end{bmatrix}. \quad (11)$$

In this case, the optimum ML decoding rule is

$$\hat{\mathbf{c}} = \arg \min_{\hat{\mathbf{c}} \in \mathcal{C}} \sum_{m=1}^M \|\mathbf{r}_m - \mathbf{H}_m \cdot \hat{\mathbf{c}}\|^2, \quad (12)$$

5 and the corresponding *uncertainty*, Δ_c , of the decoded symbols $\hat{\mathbf{c}}$ is defined by

$$\Delta_c = \sum_{m=1}^M \|\mathbf{r}_m - \mathbf{H}_m \cdot \hat{\mathbf{c}}\|^2. \quad (13)$$

As before, in the case of M receive antennas, the decoding rule can be simplified by premultiplying the received signal by \mathbf{H}_m^* .

10 As indicated above, FIG. 1 shows two terminal units 10 and 30, and the issue that needs to be addressed is the detection performance at the base station receiver when the two terminal units synchronously transmit *over the same time and frequency channel*.

In the notation below, g_{11} denotes the fading channel between
15 transmit antenna 31 and receive antenna 21, g_{12} denotes the channel between antenna 31 and antenna 22, g_{21} denotes the channel between antenna 32 and antenna 21, and g_{22} denotes the channel between antenna 32 and antenna 22. Also, $\{c_1, c_2\}$ and $\{s_1, s_2\}$ denote the two symbols transmitted from terminal units 10 and 30, respectively.

20 At receiver 20, the received signals over two consecutive symbol periods at receive antenna 21, r_{11} and r_{12} , are

$$r_{11} = h_{11}c_1 + h_{21}c_2 + g_{11}s_1 + g_{21}s_2 + \eta_{11} \quad (14)$$

$$r_{12} = -h_{11}c_2^* + h_{21}c_1^* - g_{11}s_2^* + g_{21}s_1^* + \eta_{12}. \quad (15)$$

Defining $\mathbf{r}_1 = [r_{11} r_{12}^*]^T$, $\mathbf{c} = [c_1 \ c_2]^T$, $\mathbf{s} = [s_1 \ s_2]^T$, and $\mathbf{n}_1 = [\eta_{11} \ \eta_{12}^*]^T$

equations (14) and (15) can be rewritten in matrix form as

$$\mathbf{r}_1 = \mathbf{H}_1 \cdot \mathbf{c} + \mathbf{G}_1 \cdot \mathbf{s} + \mathbf{n}_1, \quad (16)$$

where the channel matrices \mathbf{H}_1 and \mathbf{G}_1 between the transmitter units 10 and 30 and receive antenna 21 are given by

$$\mathbf{H}_1 = \begin{bmatrix} h_{11} & h_{21} \\ h_{21}^* & -h_{11}^* \end{bmatrix}, \text{ and } \mathbf{G}_1 = \begin{bmatrix} g_{11} & g_{21} \\ g_{21}^* & -g_{11}^* \end{bmatrix}. \quad (15)$$

The vector $\mathbf{n}_1 = [\eta_{11}, \eta_{12}^*]^T$ is a complex Gaussian random vector with zero mean and covariance $N_0 \cdot \mathbf{I}$. Similarly, the received signals over two consecutive symbol periods at receive antenna 22, r_{21} and r_{22} , are

$$r_{21} = h_{12}c_1 + h_{22}c_2 + g_{12}s_1 + g_{22}s_2 + \eta_{21} \quad (16)$$

$$r_{22} = -h_{12}c_2^* + h_{22}c_1^* - g_{12}s_2^* + g_{22}s_1^* + \eta_{22}. \quad (17)$$

In a similar fashion, defining $\mathbf{r}_2 = [r_{21}, r_{22}^*]^T$ and $\mathbf{n}_2 = [\eta_{21}, \eta_{22}^*]^T$ equations (16) and (17) can be rewritten as

$$\mathbf{r}_2 = \mathbf{H}_2 \cdot \mathbf{c} + \mathbf{G}_2 \cdot \mathbf{s} + \mathbf{n}_2, \quad (18)$$

where the channel matrices \mathbf{H}_2 and are given by

$$\mathbf{H}_2 = \begin{bmatrix} h_{12} & h_{22} \\ h_{22}^* & -h_{12}^* \end{bmatrix}, \text{ and } \mathbf{G}_2 = \begin{bmatrix} g_{12} & g_{22} \\ g_{22}^* & -g_{12}^* \end{bmatrix}. \quad (19)$$

Equations (14) and (18) can be combined to yield the matrix form

$$\mathbf{r} = \begin{bmatrix} \mathbf{r}_1 \\ \mathbf{r}_2 \end{bmatrix} = \begin{bmatrix} \mathbf{H}_1 & \mathbf{G}_1 \\ \mathbf{H}_2 & \mathbf{G}_2 \end{bmatrix} \begin{bmatrix} \mathbf{c} \\ \mathbf{s} \end{bmatrix} + \begin{bmatrix} \mathbf{n}_1 \\ \mathbf{n}_2 \end{bmatrix}. \quad (20)$$

Minimum Mean-Squared Error Interference Cancellation (MMSE IC)

When seeking to detect and decode signals $\{c_1, c_2\}$ by minimizing a mean-squared error criterion, the goal is find a linear combination of the received signals such that the mean-squared error in detecting the signals $\{c_1, c_2\}$ is minimized. In general terms, this can be expressed by an error cost function that is to be minimized, such as the function

$$J(\alpha, \beta) = \left\| \sum_{i=1}^4 \alpha_i^* r_i - (\beta_1^* c_1 + \beta_2^* c_2) \right\|^2 = \left\| \alpha^* \cdot \mathbf{r} - \beta^* \cdot \mathbf{c} \right\|^2, \quad (21)$$

where $\mathbf{r} = [r_1 \ r_2 \ r_3 \ r_4]^T = [r_{11} \ r_{12} \ r_{21} \ r_{22}]^T$.

5 One may note that a minimum is certainly reached when both α and β are equal to 0, but that, of course, is not desired. Therefore, either β_1 or β_2 is set to 1.

When β_1 is set to 1, we get the following minimization criterion from equation (40)

$$10 \quad J_1(\alpha_1, \beta_1) = \left\| \sum_{i=1}^5 \alpha_i^* r_{1i} - c_1 \right\|^2 = \left\| \tilde{\alpha}_1^* \tilde{\mathbf{r}}_1 - c_1 \right\|^2 = J_1(\tilde{\alpha}_1), \quad (22)$$

where $\tilde{\alpha}_1 = [\alpha_{11}, \alpha_{12}, \alpha_{13}, \alpha_{14}, -\beta_2] = [\alpha_1 \ -\beta_2]$ and $\tilde{\mathbf{r}}_1 = [\mathbf{r}^T \ c_2]^T$.

From this it can be seen that

$$\tilde{\mathbf{r}}_1 = \begin{bmatrix} \mathbf{H} & \mathbf{0} \\ \mathbf{0}^T & 1 \end{bmatrix} \begin{bmatrix} \tilde{\mathbf{c}} \\ c_2 \end{bmatrix} + \begin{bmatrix} \mathbf{n} \\ 0 \end{bmatrix} = \mathbf{R} \cdot \mathbf{d}_1 + \tilde{\eta}, \quad (23)$$

where $\mathbf{0} = [0 \ 0 \ 0 \ 0]^T$.

15 What is needed is to select $\tilde{\alpha}_1$ so that the expected value of the expression in equation (22) is minimized. That is, select $\tilde{\alpha}_1$ to minimize

$$\begin{aligned} E\{J_1(\tilde{\alpha}_1)\} &= E\{J_1(\tilde{\alpha}_1)\} = E\{(\tilde{\alpha}_1^* \tilde{\mathbf{r}}_1 - c_1)(\tilde{\alpha}_1^* \tilde{\mathbf{r}}_1 - c_1)^*\} \\ &= \tilde{\alpha}_1^* E\{\tilde{\mathbf{r}}_1 \tilde{\mathbf{r}}_1^*\} \tilde{\alpha}_1 + E\{c_1 c_1^*\} - E\{\tilde{\mathbf{r}}_1 c_1^*\} \tilde{\alpha}_1^* - E\{c_1 \tilde{\mathbf{r}}_1\} \tilde{\alpha}_1 \end{aligned} \quad (24)$$

20 Taking the partial derivative with respect to $\tilde{\alpha}_1$ and setting it to zero results in

$$\begin{bmatrix} \mathbf{M} & \mathbf{h}_2 \\ \mathbf{h}_2^* & 1 \end{bmatrix} \begin{bmatrix} \alpha_1^* \\ -\beta_2 \end{bmatrix} = \begin{bmatrix} \mathbf{h}_1 \\ 0 \end{bmatrix}, \quad (25)$$

where $\mathbf{M} = \mathbf{H}\mathbf{H}^* + \frac{1}{\Gamma}\mathbf{I}$, Γ is the signal to noise ratio, \mathbf{I} is the 4 by 4 identity matrix, \mathbf{h}_1 is the first column of \mathbf{H} , and \mathbf{h}_2 is the second column of \mathbf{H} . It follows that

$$\alpha_1 = (\mathbf{M} - \mathbf{h}_2\mathbf{h}_2^*)^{-1}\mathbf{h}_1 \quad \text{and} \quad \beta_2^* = \mathbf{h}_2^*(\mathbf{M} - \mathbf{h}_2\mathbf{h}_2^*)^{-1}\mathbf{h}_1. \quad (26)$$

5 It can be shown that

$$(\mathbf{M} - \mathbf{h}_2\mathbf{h}_2^*)^{-1} = \mathbf{M}^{-1} + \frac{\mathbf{M}^{-1}\mathbf{h}_2\mathbf{h}_2^*\mathbf{M}^{-1}}{1 - \mathbf{h}_2^*\mathbf{M}^{-1}\mathbf{h}_2}, \quad (27)$$

which yields

$$\beta_2^* = \frac{\mathbf{h}_2^*\mathbf{M}^{-1}\mathbf{h}_1}{1 - \mathbf{h}_2^*\mathbf{M}^{-1}\mathbf{h}_2}. \quad (28)$$

From the structure of the matrix \mathbf{H} we can easily verify that \mathbf{h}_1 and \mathbf{h}_2 are orthogonal. Using this fact and the structure of the matrix \mathbf{M} , it can be shown that

$$\beta_2 = 0 \quad (29)$$

$$\alpha_1 = \mathbf{M}^{-1}\mathbf{h}_1. \quad (30)$$

Hence, the MMSE IC solution given by equations (29) and (30) will minimize the mean-squared error in c_1 without any regard to c_2 .

Considering the alternative cost function when β_2 is set to 1, a similar analysis leads to the conclusion that

$$\beta_1 = 0 \quad (31)$$

$$\alpha_2 = \mathbf{M}^{-1}\mathbf{h}_2 \quad (32)$$

In this case, the MMSE IC solution given by equations (31) and (32) will minimize the mean-squared error in c_2 without any regard to c_1 . Therefore, from equations (29)-(32), we can easily see that the MMSE interference canceller for signals from terminal unit 10 will consist of two different sets of weights α_1 and α_2 for c_1 and c_2 , respectively. The

14

weights for decoding signals from terminal 30 can be obtained in a similar fashion, as expected. Thus, the decoding of signals from terminal units 10 and 30 can be performed with a single subroutine MMSE.DECODE in decoder 25 as follows:

$$(\mathbf{c}, \Delta_c) = \text{MMSE.DECODE}(\mathbf{r}_1, \mathbf{r}_2, \mathbf{H}_1, \mathbf{H}_2, \mathbf{G}_1, \mathbf{G}_2, \Gamma)$$

{

$$\tilde{\mathbf{r}} = \begin{bmatrix} \mathbf{r}_1^T & \mathbf{r}_2^T \end{bmatrix}^T$$

$$\tilde{\mathbf{H}} = \begin{bmatrix} \mathbf{H}_1 & \mathbf{G}_1 \\ \mathbf{H}_2 & \mathbf{G}_2 \end{bmatrix}$$

$$\mathbf{M} = \tilde{\mathbf{H}}\tilde{\mathbf{H}}^* + \frac{1}{\Gamma}\mathbf{I}$$

$$\mathbf{h}_1 = \begin{bmatrix} \mathbf{h}_{11} & \mathbf{h}_{21}^* & \mathbf{h}_{12} & \mathbf{h}_{22}^* \end{bmatrix}^T = \text{first column of } \tilde{\mathbf{H}}$$

$$\mathbf{h}_2 = \begin{bmatrix} \mathbf{h}_{21} & -\mathbf{h}_{11}^* & \mathbf{h}_{22} & -\mathbf{h}_{21}^* \end{bmatrix}^T = \text{second column of } \tilde{\mathbf{H}}$$

$$\alpha_1^* = \mathbf{M}^{-1}\mathbf{h}_1, \alpha_2^* = \mathbf{M}^{-1}\mathbf{h}_2$$

$$\hat{\mathbf{c}} = \arg \min_{\hat{\mathbf{c}}_1, \hat{\mathbf{c}}_2 \in \mathcal{C}} \{ \|\alpha_1^* \tilde{\mathbf{r}} - \hat{\mathbf{c}}_1\|^2 + \|\alpha_2^* \tilde{\mathbf{r}} - \hat{\mathbf{c}}_2\|^2 \}$$

$$\Delta_c = \|\alpha_1^* \tilde{\mathbf{r}} - \hat{\mathbf{c}}_1\|^2 + \|\alpha_2^* \tilde{\mathbf{r}} - \hat{\mathbf{c}}_2\|^2$$

5 }

With such a subroutine, both $\hat{\mathbf{s}}$ and $\hat{\mathbf{c}}$ can be estimated, as follows:

$$(\hat{\mathbf{c}}, \Delta) = \text{MMSE.DECODE}(\mathbf{r}_1, \mathbf{r}_2, \mathbf{H}_1, \mathbf{H}_2, \mathbf{G}_1, \mathbf{G}_2, \Gamma) \quad (33)$$

$$(\hat{\mathbf{s}}, \Delta) = \text{MMSE.DECODE}(\mathbf{r}_1, \mathbf{r}_2, \mathbf{G}_1, \mathbf{G}_2, \mathbf{H}_1, \mathbf{H}_2, \Gamma) \quad (34)$$

Additional improvement can be realized by employing a two-step interference cancellation approach. In this two-step approach, the receiver decodes signals from both terminals using the subroutine MMSE.DECODE disclosed above. Assuming that symbols from the terminal unit 10 $\hat{\mathbf{c}}_o$ have been decoded correctly, the receiver can, then, *perfectly* cancel the contribution of the terminal unit 10 in the received signal vectors \mathbf{r}_1 and \mathbf{r}_2 . The receiver then uses \mathbf{x}_1 and \mathbf{x}_2 , the received signal vectors after canceling signals from terminal unit 10, to re-

decode symbols \hat{s}_o from terminal unit 30 using the optimum ML decoding rule in equation (10). Assuming that the symbols from terminal unit 10 have been decoded correctly, the performance for terminal unit 30 will be equivalent to that with 2 transmit and 2 receive
 5 antennas (which is equivalent to 4 branch MRC diversity). The receiver then repeats the above step assuming that symbols from terminal unit 30 \hat{s}_i have been decoded correctly using the MMSE.DECODE subroutine. As before, the receiver cancels the contribution of terminal unit 30 in the received signal vectors r_1 and
 10 uses y_1 and y_2 , the received signal vectors after cancelling signals from terminal unit 30, to re-decode symbols from terminal unit 10 \hat{c}_1 using the optimum ML decoding rule in equation (10). Also as before, assuming that symbols from terminal unit 30 have been decoded correctly, the performance for terminal unit 10 will be equivalent to that
 15 with 2 transmit and 2 receive antennas. Letting $\Delta_o = \Delta_{c_o} + \Delta_{s_o}$ and $\Delta_1 = \Delta_{c_1} + \Delta_{s_1}$ denote the overall uncertainty for \hat{c}_o and \hat{s}_o , and for \hat{c}_1 and \hat{s}_1 , respectively, the receiver compares the overall uncertainty and chooses the pair (\hat{c}_o, \hat{s}_o) if $\Delta_o < \Delta_1$, and (\hat{c}_1, \hat{s}_1) otherwise. The two-step interference cancellation and ML decoding algorithm is presented
 20 below in pseudo-code subroutine II.MMSE.DECODE.

16

$$\begin{aligned}
& (\hat{\mathbf{c}}, \hat{\mathbf{s}}) = \text{II.DECODE}(\mathbf{r}_1, \mathbf{r}_2, \mathbf{H}_1, \mathbf{H}_2, \mathbf{G}_1, \mathbf{G}_2, \Gamma) \\
& \{ \\
& \quad (\hat{\mathbf{c}}_0, \Delta_{c,0}) = \text{MMSE.DECODE}(\mathbf{r}_1, \mathbf{r}_2, \mathbf{H}_1, \mathbf{H}_2, \mathbf{G}_1, \mathbf{G}_2, \Gamma) \\
& \quad \quad \mathbf{x}_1 = \mathbf{r}_1 - \mathbf{H}_1 \cdot \hat{\mathbf{c}}_0 \quad , \quad \mathbf{x}_2 = \mathbf{r}_2 - \mathbf{H}_2 \cdot \hat{\mathbf{c}}_0 \\
& \quad \quad F(\mathbf{s}) = \|\mathbf{x}_1 - \mathbf{G}_1 \cdot \mathbf{s}\|^2 + \|\mathbf{x}_2 - \mathbf{G}_2 \cdot \mathbf{s}\|^2 \\
& \quad \quad \hat{\mathbf{s}}_0 = \arg \min_{\mathbf{s} \in \mathbf{S}} (F(\mathbf{s})) \quad , \quad \Delta_{s,0} = F(\hat{\mathbf{s}}_0) \\
& \quad (\hat{\mathbf{s}}_1, \Delta_{s,1}) = \text{MMSE.DECODE}(\mathbf{r}_1, \mathbf{r}_2, \mathbf{G}_1, \mathbf{G}_2, \mathbf{H}_1, \mathbf{H}_2, \Gamma) \\
& \quad \quad \mathbf{y}_1 = \mathbf{r}_1 - \mathbf{G}_1 \cdot \hat{\mathbf{s}}_1 \quad , \quad \mathbf{y}_2 = \mathbf{r}_2 - \mathbf{G}_2 \cdot \hat{\mathbf{s}}_1 \\
& \quad \quad F(\mathbf{c}) = \|\mathbf{y}_1 - \mathbf{H}_1 \cdot \mathbf{c}\|^2 + \|\mathbf{y}_2 - \mathbf{H}_2 \cdot \mathbf{c}\|^2 \\
& \quad \quad \hat{\mathbf{c}}_1 = \arg \min_{\mathbf{c} \in \mathbf{C}} (F(\mathbf{c})) \quad , \quad \Delta_{c,1} = F(\hat{\mathbf{c}}_1) \\
& \quad \text{If } (\Delta_{c,0} + \Delta_{s,0}) < (\Delta_{c,1} + \Delta_{s,1}) \\
& \quad \quad (\hat{\mathbf{c}}, \hat{\mathbf{s}}) = (\hat{\mathbf{c}}_0, \hat{\mathbf{s}}_0) \\
& \quad \text{Else} \\
& \quad \quad (\hat{\mathbf{c}}, \hat{\mathbf{s}}) = (\hat{\mathbf{c}}_1, \hat{\mathbf{s}}_1) \\
& \}
\end{aligned}$$

With appreciation of the above-disclosed theoretical background, we realized that enhanced performance is attained by devoting the space-time block coding to interference cancellation and ML decoding, while another coding schema may be used to overcome channel-caused degradations, such as fading. Accordingly, each of the transmitters in FIG. 1 includes a channel coder (14 and 34, respectively) that is interposed between the input signal and the transmitter's space-time block coder. Channel coders 14 and 24 can employ any conventional channel error correcting code (for example a trellis code, or a convolutional code).

At receiver 20, the inner space-time block code is decoded in element 26 and is used to suppress interference from the various co-channel terminals, using the MMSE approach disclosed above.

Element 26 forms the two interference canceling vectors α_{i1} and α_{i2} corresponding to some terminal, i , and element 27 forms the two decision variables

$$\xi_1 = \alpha_1^* \mathbf{r} \quad \text{and} \quad \xi_2 = \alpha_2^* \mathbf{r} \quad (35)$$

5 Those decisions, however, are used as soft decisions of the transmitted information symbols, and are fed to channel decoder 28, which is a conventional decoder that corresponds to the type of encoding performed in channel encoders 14 and 34. Thus, in the arrangement depicted in FIG. 1, the structure of an inner coder is used for
 10 interference suppression, such that many co-channel terminals can operate simultaneously while providing diversity. The output of the inner code space-time decoder forms the input to the outer coder decoder, which decides on the transmitted information while providing protection against channel errors.

15 FIG. 2 presents an arrangement for increasing the data rate or throughput in wireless systems. In FIG. 2, the information to be transmitted is demultiplexed in element 40 into two streams. One stream is applied to channel encoder 41, and the other stream is applied to channel encoder 51. The output of channel encoder 41 is applied to
 20 space-time block encoder 42, and then to mapper and pulse shaper 43 and antennas 44 and 45. Similarly, the output of channel encoder 51 is applied to space-time block encoder 52, and then to mapper and pulse shaper 53 and antennas 54 and 45. Generalizing, information symbols from a transmitting terminal are split into L parallel streams. Stream l
 25 is then encoded using a channel code with rate R_l and then coded with a space-time block encoder with N transmitting antennas. The coding rates can be the same, but an advantage accrues when the coding rates are chosen such that $R_1 > R_2 > \dots > R_L$. In such a case, symbols transmitted in stream l will have better immunity against channel errors

as compared to symbols transmitted in stream u where $u > l$. The base station receiver is assumed to be equipped with at least L receive antennas. The base station receiver treats each stream as a different user and uses the iterative interference cancellation techniques disclosed above, or the ones disclosed in the aforementioned '163 application. Since the first stream has the smallest coding rate R_1 , it has the best immunity against the channel errors and most likely it will be error free. The receiver then uses the decoded symbol of stream 1 to subtract the contributions of the first stream in the total received signals, while decoding the remaining $L-1$ streams. In decoding the remaining $L-1$ streams, the decoder decodes signals from the second stream first, since it has the best immunity against channel errors among the remaining $L-1$ streams (due to its lowest rate, R_2 from among the remaining streams). Then the receiver uses the decoded symbols for the second stream to cancel out its contribution in the received signal. This process is repeated until all streams are decoded.

It can be shown that, in this case, the system throughput is given by

$$\rho = \frac{1}{L} \sum_{l=1}^L R_l (1 - FER_l), \quad (36)$$

where FER_l is the frame error rate of stream l .

Claims:

1. An arrangement comprising:
a channel code encoder responsive to an applied input signal,
a space-time encoder responsive to output signal of said channel
5 code encoder; and
a modulator responsive to said space time-encoder.
2. The arrangement of claim 1 further comprising pulse shaping
circuitry and at least two antennas for transmitting a space-time coded
10 signal created by said space-time encoder and modulated by said
modulator.
3. A transmitter comprising:
a demultiplexer responsive to an applied input signal for
15 developing a plurality of at least two signal streams, and
a like plurality of channel coding/space-time coding
transmitters, each responsive to a different signal stream of said
plurality of signal streams.
- 20 4. The transmitter of claim 3 where each of said channel
coding/space-time coding transmitters comprises:
a channel coder of rate R_i ,
a space-time encoder responsive to output signal of said channel
code encoder,
25 a modulator responsive to said space time-encoder,
pulse shaping circuitry responsive to said modulator, and
at least two antennas for transmitting a space-time coded signal
created by said space-time encoder, modulated by said modulator, and
conditioned by said pulse shaping circuitry.

5 5. The transmitter of claim 4 where said demultiplexer develops an L plurality of signal streams, where said channel coders in said L channel coding/space-time coding transmitters develop rates R_i $i=1,2,...,L$, that are not identical to each other.

6. The transmitter of claim 4 where said demultiplexer develops an L plurality of signal streams, where said channel coders in said L channel coding/space-time coding transmitters develop rates R_i $i=1,2,...,L$, that are such that $R_1 > R_2 > \dots > R_L$.

7. The transmitter of claim 1 where said channel code encoder performs trellis encoding.

15 8. The transmitter of claim 1 where said channel code encoder performs convolutional encoding.

9. A receiver comprising:
a detector of space-time coded signal; and
20 a decoder for decoding a channel code encoded signal that is embedded in output signals of said detector.

10. The receiver of claim 9 where said detector employs a MMSE IC decoder.

25 11. The receiver of claim 9 where said detector employs a two step algorithm to develop a weights vector for canceling interfering signals from terminals other than a given terminal whose signal is being detected.



12. The receiver of claim 11 where said two step algorithm is:

$$\begin{aligned}
 &(\hat{\mathbf{c}}, \hat{\mathbf{s}}) = \text{II.DECODE}(\mathbf{r}_1, \mathbf{r}_2, \mathbf{H}_1, \mathbf{H}_2, \mathbf{G}_1, \mathbf{G}_2, \Gamma) \\
 &\{ \\
 &\quad (\hat{\mathbf{c}}_o, \Delta_{c,o}) = \text{MMSE.DECODE}(\mathbf{r}_1, \mathbf{r}_2, \mathbf{H}_1, \mathbf{H}_2, \mathbf{G}_1, \mathbf{G}_2, \Gamma) \\
 &\quad \quad \mathbf{x}_1 = \mathbf{r}_1 - \mathbf{H}_1 \cdot \hat{\mathbf{c}}_o \quad , \quad \mathbf{x}_2 = \mathbf{r}_2 - \mathbf{H}_2 \cdot \hat{\mathbf{c}}_o \\
 &\quad \quad F(\mathbf{s}) = \|\mathbf{x}_1 - \mathbf{G}_1 \cdot \mathbf{s}\|^2 + \|\mathbf{x}_2 - \mathbf{G}_2 \cdot \mathbf{s}\|^2 \\
 &\quad \quad \hat{\mathbf{s}}_o = \arg \min_{\mathbf{s} \in \mathbf{S}} (F(\mathbf{s})) \quad , \quad \Delta_{s,o} = F(\mathbf{s}) \\
 &\quad (\hat{\mathbf{s}}_1, \Delta_{s,1}) = \text{MMSE.DECODE}(\mathbf{r}_1, \mathbf{r}_2, \mathbf{G}_1, \mathbf{G}_2, \mathbf{H}_1, \mathbf{H}_2, \Gamma) \\
 &\quad \quad \mathbf{y}_1 = \mathbf{r}_1 - \mathbf{G}_1 \cdot \hat{\mathbf{s}}_1 \quad , \quad \mathbf{y}_2 = \mathbf{r}_2 - \mathbf{G}_2 \cdot \hat{\mathbf{s}}_1 \\
 &\quad \quad F(\mathbf{c}) = \|\mathbf{y}_1 - \mathbf{H}_1 \cdot \mathbf{c}\|^2 + \|\mathbf{y}_2 - \mathbf{H}_2 \cdot \mathbf{c}\|^2 \\
 &\quad \quad \hat{\mathbf{c}}_1 = \arg \min_{\mathbf{c} \in \mathbf{C}} (F(\mathbf{c})) \quad , \quad \Delta_{c,1} = F(\mathbf{c}) \\
 &\quad \text{If } (\Delta_{c,o} + \Delta_{s,o}) < (\Delta_{c,1} + \Delta_{s,1}) \\
 &\quad \quad (\hat{\mathbf{c}}, \hat{\mathbf{s}}) = (\hat{\mathbf{c}}_o, \hat{\mathbf{s}}_o) \\
 &\quad \text{Else} \\
 &\quad \quad (\hat{\mathbf{c}}, \hat{\mathbf{s}}) = (\hat{\mathbf{c}}_1, \hat{\mathbf{s}}_1) \\
 &\}
 \end{aligned}$$

5 13. The receiver of claim 9 where said decoder for decoding a channel code is a trellis decoder.


14. The receiver of claim 9 where said decoder for decoding a channel code is a convolutional decoder.

FIG. 1

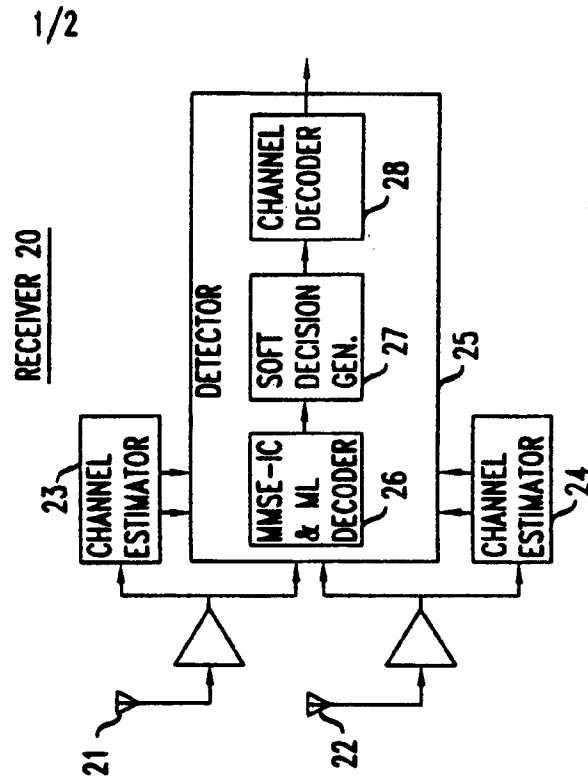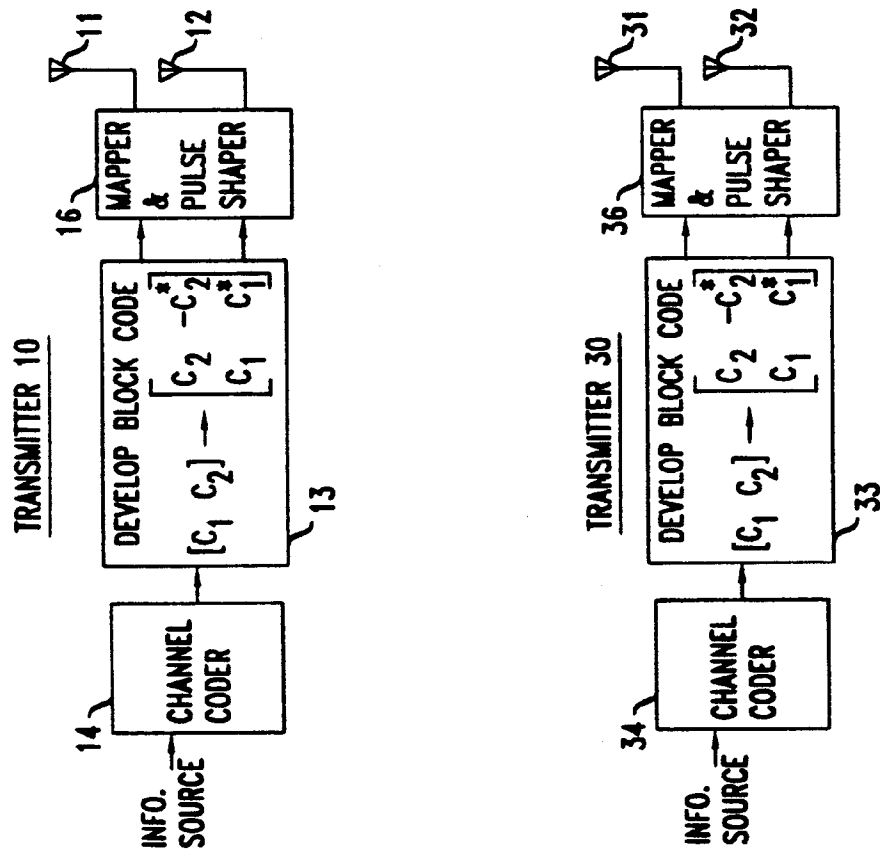

2/2

FIG. 2

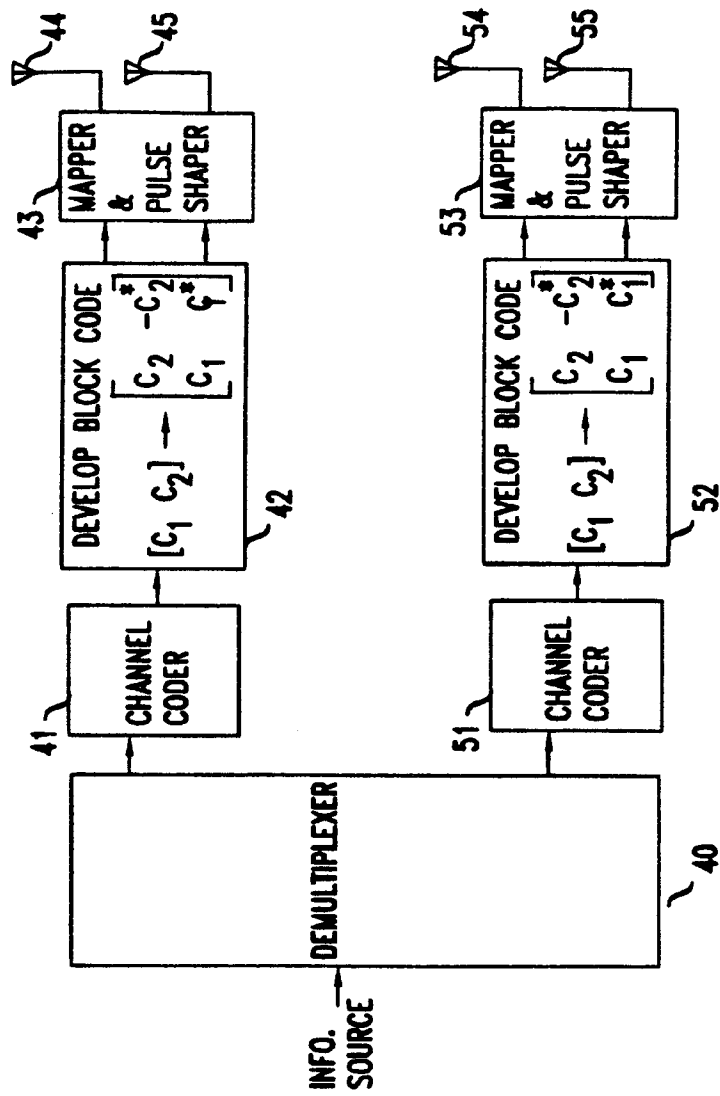

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/19117

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L1/00 H04L1/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 41670 A (AT & T CORP) 6 November 1997 (1997-11-06) page 33, line 1 - line 21 figure 21	1,2,9, 10,13,14
A		3-8,11, 12
X	NAGUIB A F ET AL: "Space-time coded modulation for high data rate wireless communications" GLOBAL TELECOMMUNICATIONS CONFERENCE (GLOBECOM'97), PHOENIX, AZ, USA, 3 - 8 November 1997, pages 102-109, XP000737596 US, NEW YORK, IEEE ISBN: 0-7803-4199-6 section 3.2 figure 5	1,2,9, 10,13,14
A		3-8,11, 12
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

13 December 1999

Date of mailing of the international search report

17/12/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 661 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Ghigliotti, L

INTERNATIONAL SEARCH REPORT

Int. Application No
PCT/US 99/19117

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>TAROKH V ET AL: "Space-time codes for high data rate wireless communication: performance criterion and code construction"</p> <p>IEEE TRANSACTIONS ON INFORMATION THEORY,US,IEEE INC. NEW YORK, vol. 44, no. 2, March 1998 (1998-03), pages 744-765, XP002089112</p> <p>ISSN: 0018-9448</p> <p>cited in the application</p> <p>the whole document</p>	1-14
X,P	<p>WO 99 23766 A (AT & T WIRELESS SERVICES INC) 14 May 1999 (1999-05-14)</p> <p>page 4, line 25 - line 30</p> <p>claims 1-5</p>	1,2,9, 10,13,14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/19117

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9741670 A	06-11-1997	AU 2744097 A CA 2252664 A EP 0906669 A	19-11-1997 06-11-1997 07-04-1999
WO 9923766 A	14-05-1999	EP 0960487 A	01-12-1999